

# Spectrum™ 360° Adjustable Flow



An adjustable flow, full circle vortex sprayer with fine water droplets. Flow and coverage can be altered by rotating the cap.

## Features

- Finger-tip flow control with shut-off option.
- Spike model to anchor Spectrum™ at the plant.
- Barb model for direct attachment to feeder and supply lines.
- Threaded model for installation into Rigid Risers and Asta® Stakes.
- 1/2" Threaded model for riser pipe installations.

## Applications

Pots, tubs, ground cover, landscaped gardens and nurseries. Waters large garden areas when used with Asta® Stakes and risers.




Performance		360°	
	PRESSURE (kPa)	FLOW (lph)	Diameter (m)
fully open (approx. 22 clicks)	100	64	2.8
	150	78	3.6
	200	90	4.0




Spectrum™ Spike 4mm

## Flow Rate

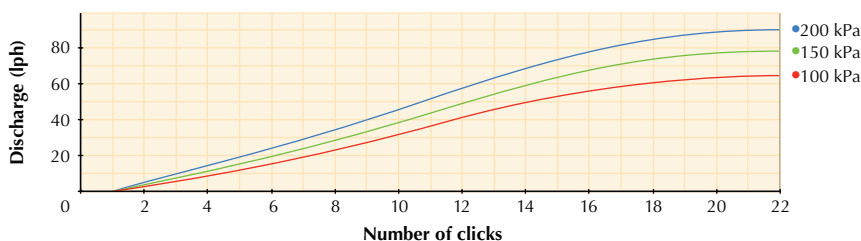

## Diameter of Throw

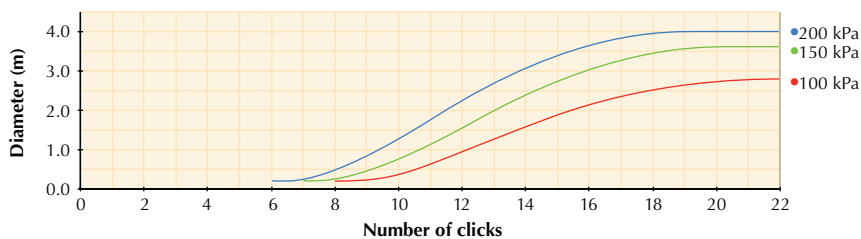

Spectrum™ Barb 4mm

Spectrum™ Thread 4mm

## Spectrum™ 360°

BASE TYPE	ORDER CODE	PACK QUANTITY	PACKS PER CARTON	CARTON (kg)
Barb 4 mm	32045	50	100	11.8
Thread 4 mm	32015	50	100	13.8
Thread 1/2" FNPT	32025	25	65	9.1
Spike	32095	25	40	6.5



Spectrum™ Thread 1/2"

## Specifications

DIMENSIONS ASSEMBLED		BARB	THREAD	TAPER	THREAD 1/2"	SPIKE
HEIGHT		26 mm	26 mm	26 mm	37 mm	137 mm
WIDTH		20 mm	20 mm	20 mm	26 mm	42 mm
DEPTH		16 mm	16 mm	16 mm	26 mm	16 mm
WEIGHT (approx)		1.7 g	2.1 g	2.7 g	4.9 g	5.5 g
UV STABILISED MATERIAL	BASE CAP DEFLECTOR	polypropylene polypropylene acetal	acetal polypropylene acetal	acetal polypropylene acetal	polypropylene polypropylene acetal	polypropylene polypropylene acetal
BASE/CONNECTION TYPE: Inlet		BARB 4 mm	10-32 UNF THREAD 4 mm	TAPER # 6 (Refer Page 4.0)	THREAD 1/2" FNPT	BARB 4 mm

SPRAYS